



STORAGE TANKS




Standard Features:

- Porcelain enamel lined tank
- Heavy duty anode rods
- ASME construction available
- 2" of rigid foam insulation
- Baked enamel steel jacket
- 5 year limited warranty



These models exceed the minimum efficiency requirements of ASHRAE Standard 90.1 (Part of the Federally mandated Energy Policy Act (EPact)).

DIMENSIONAL INFORMATION (DIMENSIONS SHOWN IN INCHES)								
MODEL NUMBER	A	B	C	D	WATER CONNECTIONS		APPROX. WEIGHT (LBS.)	
					TOP OUTLET	FRONT SIDE	STANDARD	ASME
ST80(A)	58-5/16	24-3/16	13-3/16	6-3/16	2	2	220 lbs.	260 lbs.
ST120(A)	59-1/4	28-1/4	11-1/16	4-1/16	2	2	300 lbs.	340 lbs.
ST175(A)	67-1/4	32-1/4	12-9/16	5-9/16	2-1/2	2-1/2	600 lbs.	600 lbs.

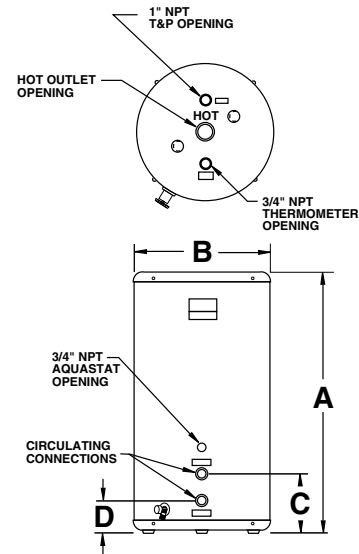

TANK INFORMATION			
MODEL NUMBER	TANK CAPACITY (GALLONS)	MAXIMUM WORKING PRESSURE	
		STD.	ASME
ST80(A)	80	150 PSI	125 PSI
ST120(A)	115	150 PSI	160 PSI
ST175(A)	175	150 PSI	150 PSI